CUSTOMER DRAWING

RoHS

HF

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:
   1-1. CONTACT RESISTANCE: 30mΩ MAX.(INITIAL)
   AFTER LIFE TEST 50mΩ.
   1-2. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
   1-3. INSULATION RESISTANCE: 1000 MΩ MIN. MEASURED BY 500 VDC.
2. MECHANICAL CHARACTERISTICS:
   2-1. INSERTION FORCE : 2.7 KGF Max
   2-2. WITHDRAWAL FORCE : 1.0~2.0Kgf INITIAL ,0.7~2.7Kgf AFTER TEST.
   2-3. TERMINAL RETENTION FORCE: 0.5KGF/PIN MIN.
3. LIFE TEST: 5,000 CYCLES.
4. (XX) MARK IS FAI DIM. ▲ MARK IS MAJOR DIM. (C) MARK IS CPK DIM.
5. PART NO: WUSF10004-0A00

PLATING: GOLD 1u"
PACKING: REEL
RoHS + HF

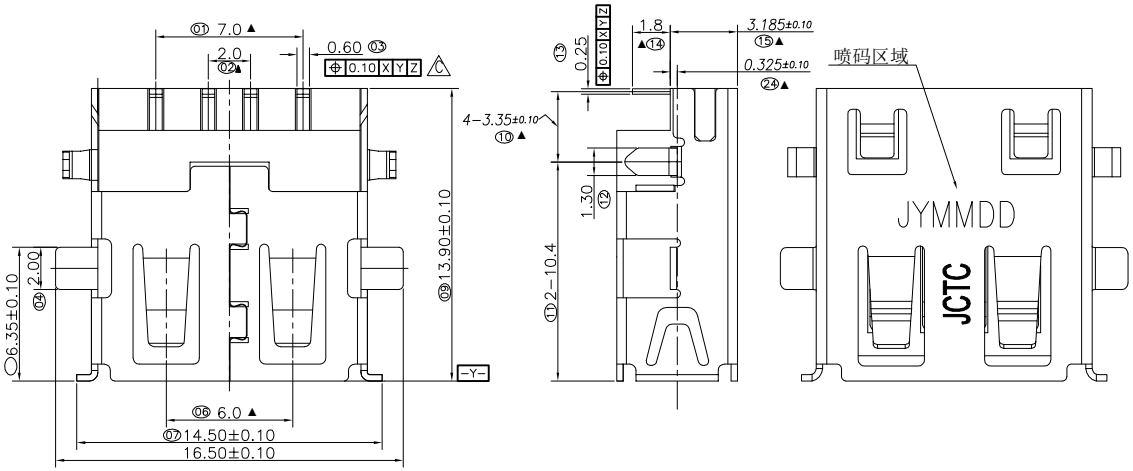

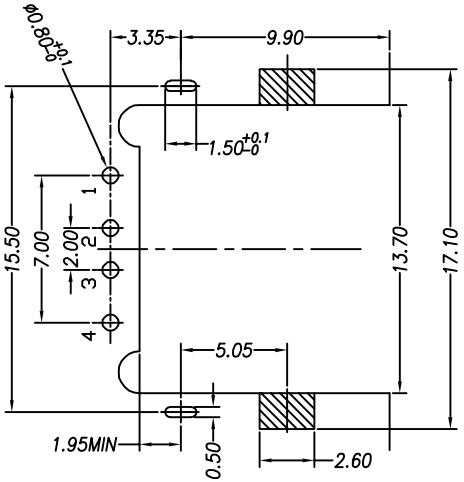

P.C.B (TOLERANCES ±0.05mm)

THICKNESS=1.2mm

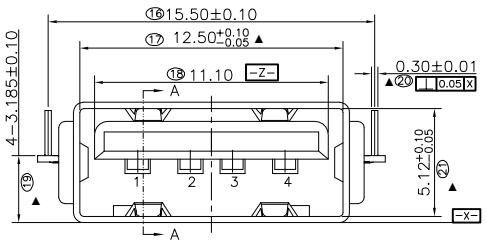

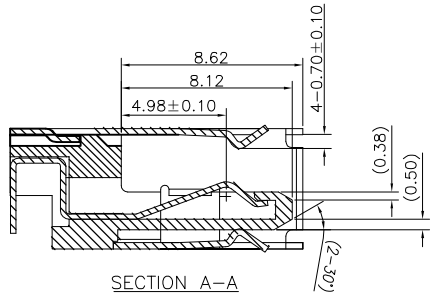

SECTION A-A

序号	零件	数量	材质规格	电镀&颜色
3	外壳	1	SUS304 T=0.3mm	ALL OVER Ni 50~100u"
2	端子	4	C5191R-EH,T=0.25mm	G/F ON CONTACT ARER Sn 100 u"ON SOLDER AREA ALL OVER Ni 50 u"Min
1	本体	1	LCP E130i UL94 V-0	BLACK

REV.	REVISION RECORD	DATE
A	New edition	2018.01.18
B	EC SHELL	2018.03.29

UNIT: MM
SIZE: A4

GENERAL TOLERANCES	
LINEAR	ANGLES
0.0 ±0.10	X°REF± 6'
0.00 ±0.10	X° ± 3'
0.000±0.05	X°X' ± 2'

	NAME	DATE
SCALE:		
APPROVED		
DESIGNER		
DRAWN	Yangyu	2018.03.29

WJCT
苏州伟聚电子科技有限公司

TITLE: USB2.0 沉板母座翻边 SUS304 A TYPE

PART.NO: WUSF10004-0A00.

DWG.NO: 605-0000-0094

REV: A SHEET: 1/1