

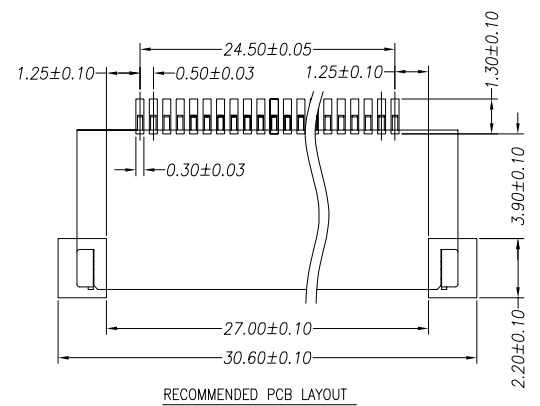
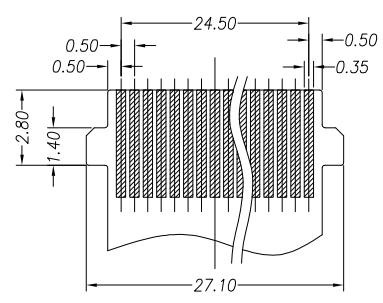
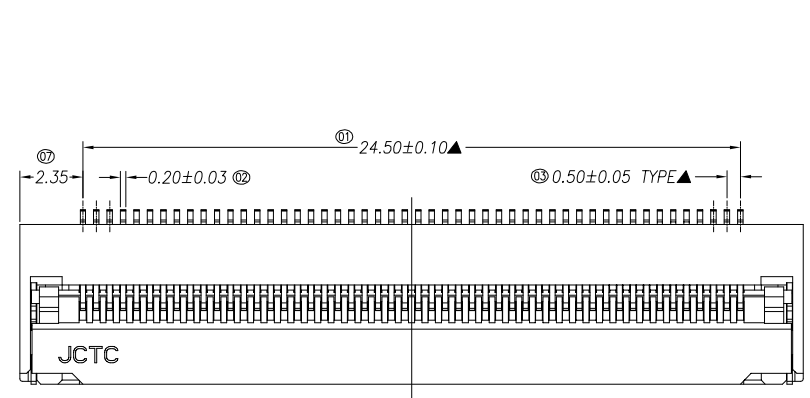

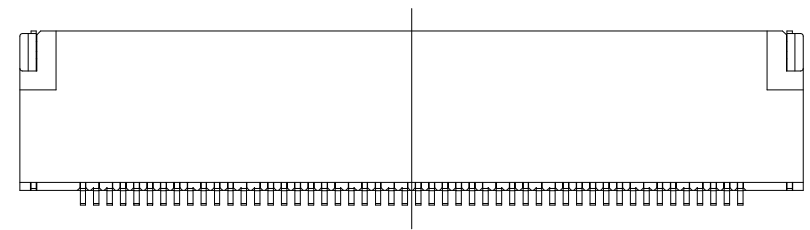
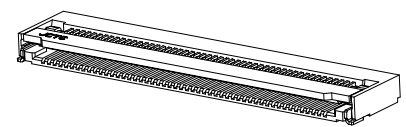


RoHS  
HF

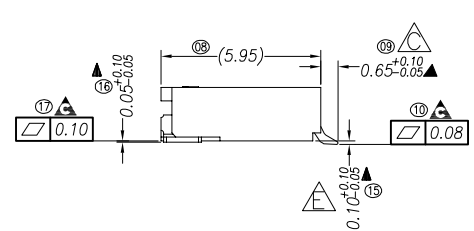

APPLICABLE FPC DIMENSION  
(THICKNESS: 0.3±0.05)

RECOMMENDED PCB LAYOUT

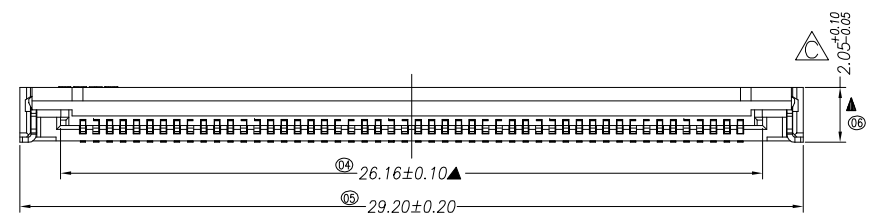


(ACTUATOR OPEN)

NOTES:

- 材质:
  - HOUSING: LCP 2140GM UL94V-0, NATURE.
  - COVER: LCP E6808 UL94V-0, BLACK.
  - TERMINAL: C5210-H, Gold Flash.
  - LEFT/RIGHT PEG: C2680-H, 100u" MATTE Tin PLATED.
- 接触阻抗: 30mΩ MAX. INITIAL.
- 耐压: 250V AC 1 MINUTE.
- 绝缘: 500MΩ MIN.
- 平面度: 端子脚IR前0.08mm MAX, IR后0.10mm MAX;  
定位片脚IR前0.10mm MAX, IR后0.13mm MAX.
- PIN保持力: 50g MIN
- FAI DIM. ▲ 重点 DIM. ▲ CPK DIM.
- PART NO: W4050150-001

50:50PIN

			日期 DATE	料号 PART NO.	W4050150-001	 苏州伟聚电子科技有限公司 比例SCALE: 1:1 页码SHEET: 1/1 版次REV: E				
E	焊脚尺寸公差放宽	Peak	7.7' 14	设计 DESIGN	Peak			4.19' 13	图号 DRAWING NO.	W40501
D	修改尺寸公差	Peak	03.11' 14	审核 CHK.	Peak			4.19' 13	品名 TITLE	0.5PH 2.0H 50PIN FPC
C	依实物调整焊脚及高度尺寸	Peak	12.04' 13	核准 APPD.	Rain	4.19' 13				
版次REV.	变更内容 DESCRIPTION	设计 DESIGN	日期 DATE	一般公差 TOLERANCE X.X = ±0.20 X.XX = ±0.10 X.XXX = ±0.05 ANG. = ±2°						



单位 UNIT: mm