



1. ELECTRICAL CHARAC TERISTIC S
- 1-1 CURRENT RATING:0.5AMP.
- 1-2 VOLTAGE RATING:40V
- 1-3 CONTACT RESISTANCE: 30mΩ MAX.
- 1-4 INSULATION RESISTANCE:100MΩ MIN AT 500V DC
- 1-5 DIELECTRIC WITHSTANDING VOLTAGE:500V AC FOR 1 MINUTE
2. MECHANICAL CHARAC TERISTIC S
- 2-1 INSERTION FORCE: 4.5KGF MAX.
- 2-2 WITHDRAWAL FORCE:1.0-4.0KGF
3. LIFE TEST:10000 CYCLES
4. PLEASE REFER TO "HDMI SERIES SPEC" ABOUT OTHER GENERAL SPEC.
5. PACKAGE: TAPE REEL
6. THE "▲" MARK SHOWS DIMENSION OF IMPORTANT.
THE "△" MARK SHOWS DIMENSION OF CPK.

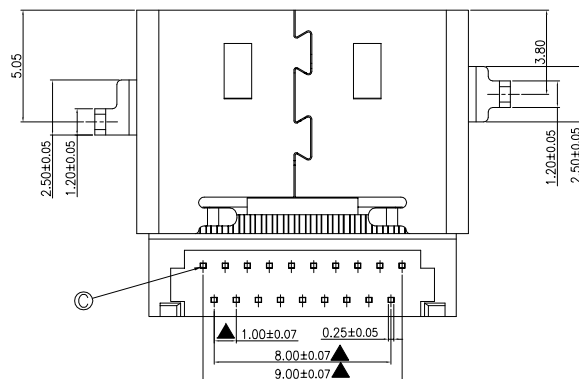


D/C:

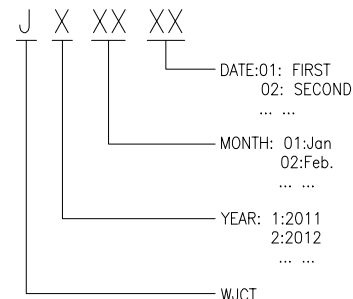

W-00-6229-1900	1.60	1.55
W-00-6229-1900A	1.20	1.10
料号	尺寸A	尺寸B

D	CAP	1	LCP,UL94V-0	BLACK
C	CONTACT	19	C2680,T=0.2	GOLD PLATING ON CONTACT AREA,MATTE TIN PLATING ON SOLDER AREA
B	SHELL	1	S50C,T=0.5	NICKEL PLATING
A	HOUSING	1	LCP,UL94V-0	BLACK
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING & COLOR

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	<div> 苏州伟聚电子科技有限公司</div>	PART.NO: W-00-6229-1900*			
A	FIRST VERSION	6/15'15		LINEAR	ANGLES	APPROVED	SAM	12/04'2015		DWG.NO: W-00-6229-1900			
B	CHANGE THE TERMINAL GAP DIMENSION	8/30'15		0.0 ±0.30	X'REF± 6°								
C	CHANGE THE SHELL TOLERANCE	11/17'2015		UNIT: MM	0.00 ±0.20	X° ± 3°	DESIGNER	SAM		12/04'2015	TITLE: HDMI A TYPE FEMALE, RVS, SINK,CH=0.75	REV: D	SHEET: 1/1
D	ADD MANAGEMENT DIMENSION	12/04'2015		SIZE: A4	0.000±0.10	X'X' ± 2°							

WJCT
苏州伟聚电子科技有限公司

TITLE:
HDMI A TYPE FEMALE, RVS, SINK,CH=0.75

PART.NO: W-00-6229-1900*

DWG.NO:	W-00-6229-1900
---------	----------------

REV: D	SHEET: 1/1
--------	------------