CUSTOMER DRAWING

RoHS

HF

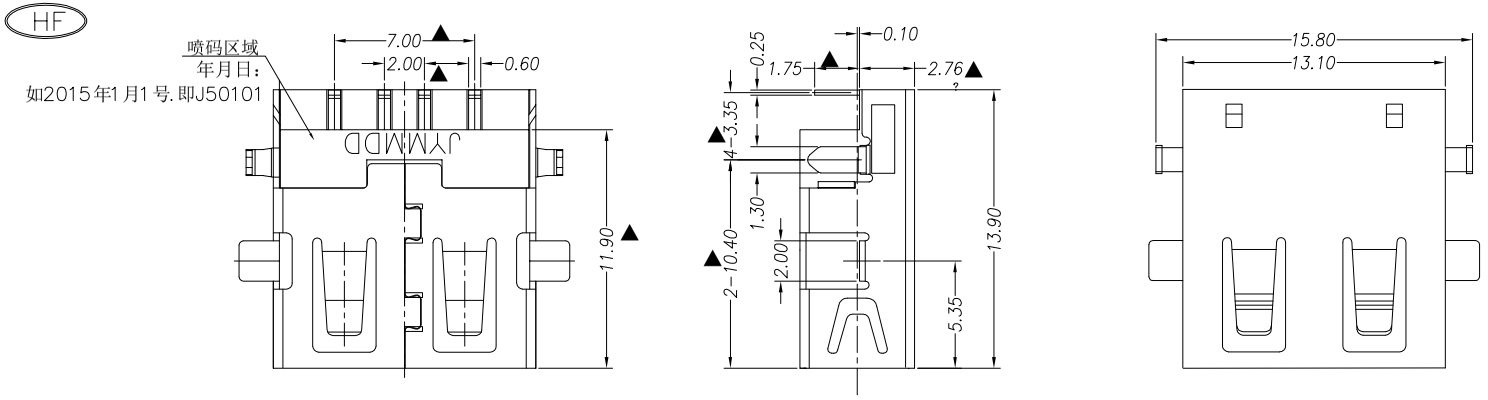

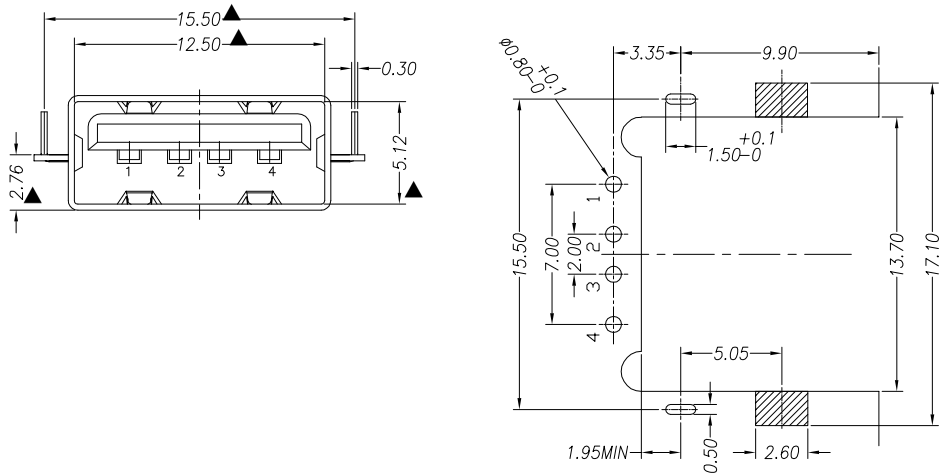

P.C.B (TOLERANCES±0.05mm)
THICKNESS=1.2mm

NOTES:

1.MATERIAL:
HOUSING: LCP UL 94V-0 COLOR: BLACK
SHELL: STELL(SK7) T=0.3mm
CONTACT: PHOSPHOR BRONZE t=0.25mm

2.PLATING:
SHELL : 100u" Min Nickle PLATING
CONTACT : GOLD PLATING IN THE CONTACT AREA, AND Sn PLATED ON THE SOLDER TAIL AREA, WITH 50u"(NICKEL UNDERPLATING OVERALL.

3.DURABILITY: 5000 CYCLES.

4.MATING FORCE: 3.5KGF MAX.

5.UNMATING FORCE: 1~1500 CYCLES: 1.0KGF MIN.,2.7KGF MAX.;
1500~5000 CYCLES: 0.7KGF MIN.,2.7KGF MAX.

6. ▲MARK IS MAJOR DIM.

7.PN: WUSF7604-0A00
- 4PIN
- USB SERIES

REV.	REVISION RECORD	DATE
B	Change length of terminal	2015.08.25
C	Correction of the drawings	2016.03.15

UNIT: MM
SIZE: A4

GENERAL TOLERANCES	
LINEAR	ANGLES
0.0 ±0.20	X°REF± 6°
0.00 ±0.15	X° ± 3°
0.000±0.10	X°X' ± 2°

SCALE:	NAME	DATE
APPROVED		
DESIGNER		
DRAWN	YXY	03.17.16

WJCT
苏州伟聚电子科技有限公司

TITLE: USB 2.0 H2.76(沉板母座无翻边)

PART.NO: WUSF7604-0A00

DWG.NO: 605-0000-0068

REV: C SHEET: 1/1