
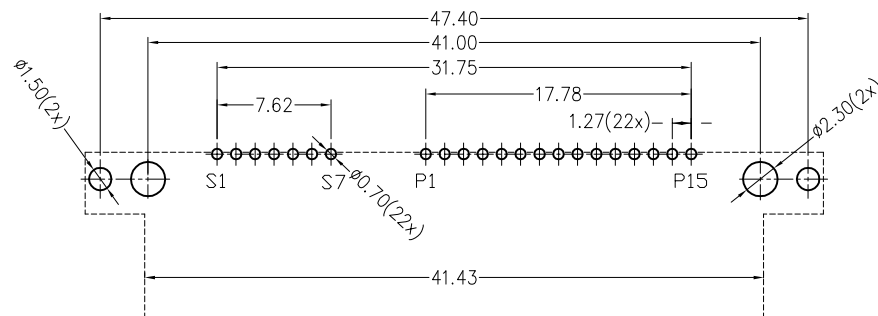

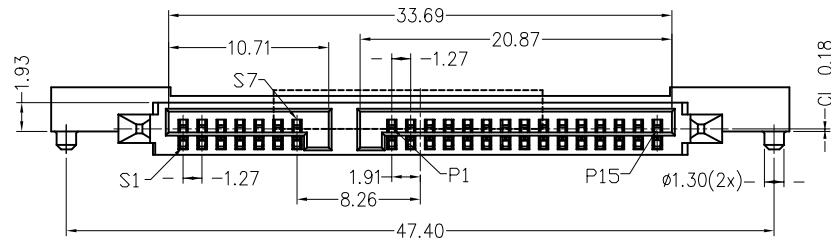
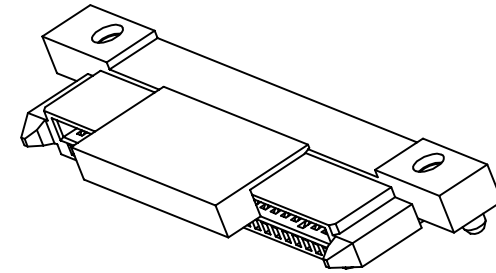


RoHS  
HF

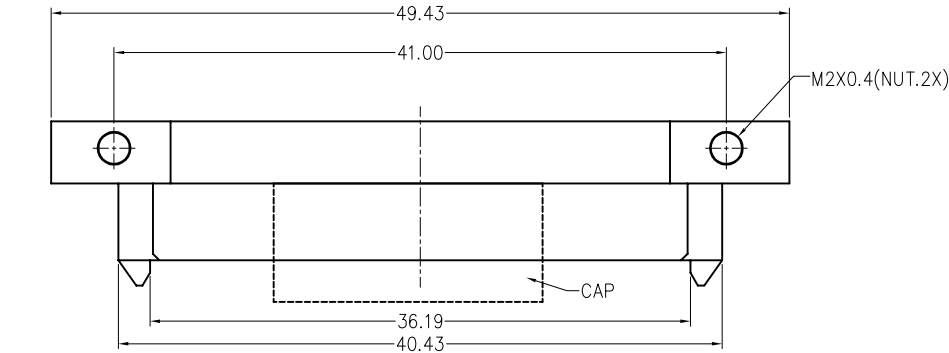

RECOMMEND PCB LAYOUT  
DEFAULT TOERANCES: ±0.05;PCB THICKNESS:1.0mm

NOTES:

- MATERIAL:  
INSULATOR: LCP,30%GLASS FILLED,UL 94V-0  
RATED OR OTHER EQUIVALENT HIGH  
TEMP RESINS.  
CONTACT:PHOSPHOR BRONZE .
- FINISH:  
CONTACT: GOLD PLATING IN THE CONTACT AREA AND SELECT  
PLATING MATTE Sn 80-120u" IN THE SOLDER TAIL AREA,WITH 50-100u"  
NICKEL UNDERPLATING OVERALL
- MECHANICAL:  
TERMINAL RETENTION FORCE:0.4kgf Min.  
CAP RETENTION FORCE:0.3kgf Min.  
NUT LOCKING FORCE:1.0kgf Max.  
MATING FORCE:20N Max.  
UNMATING FORCE:4N Min.  
DURABILITY:500 CYCLES.

| REV. | REVISION RECORD | DATE         |          | GENERAL TOLERANCES |           | SCALE: 1:1 | NAME     | DATE       |         | PART.NO:                       |
|------|-----------------|--------------|----------|--------------------|-----------|------------|----------|------------|---------|--------------------------------|
| A    | 初版发行            | 2017. 12. 13 |          |                    | LINEAR    | ANGLES     | APPROVED | Ken        |         | 01/13'2018                     |
| B    | 更新插拔力标准         | 2018. 01. 13 |          | 0.0 ±0.30          | X'REF± 6° | DESIGNER   | yangyu   | 01/13'2018 | DWG.NO: | 630-0000-0005                  |
|      |                 |              | UNIT: MM | 0.00 ±0.20         | X' ± 3°   | DRAWN      | yangyu   | 01/13'2018 | TITLE:  | SATA 22PIN DIP TYPE RECEPTACLE |
|      |                 |              | SIZE: A4 | 0.000±0.10         | X'X' ± 2° |            |          |            | REV:    | B                              |
|      |                 |              |          |                    |           |            |          |            | SHEET:  | 1/1                            |