RoHS
HF

CUSTOMER DRAWING

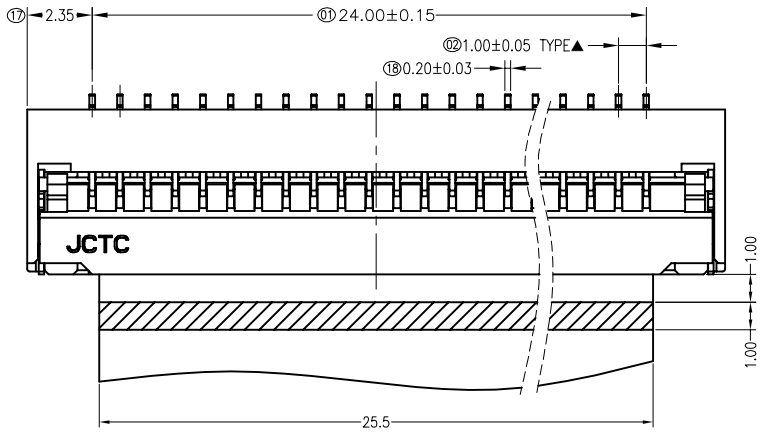

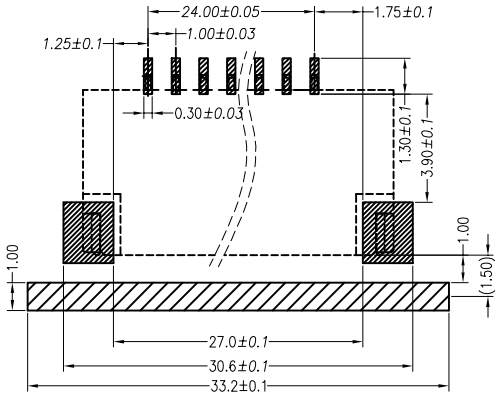

RECOMMENDED PCB LAYOUT

NOTES:

1.MATERAIL:
(1)HOUSING/COVER: THERMOPLASTIC UL94V-0,NATURE/BLACK.
(2)TERMINAL: Phosphor Bronze,Gold Flash.
(3)LEFT/RIGHT PEG: BRASS, 100u" MATTE Tin PLATED.
2.CONTACT RESISTANCE : 30mΩ MAX. INITIAL.
3.DIELECTRIC WITHSTANDING VOLTAGE : 250V AC 1 MINUTE.
4.INSULATION RESISTANCE : 500MΩ MIN.
5.ⓧⓧ MARK IS FAI DIM.▲ MARK IS MAJOR DIM. ⚠ MARK IS CPK DIM.
6.PART NO: W4100125-001
25:25PIN

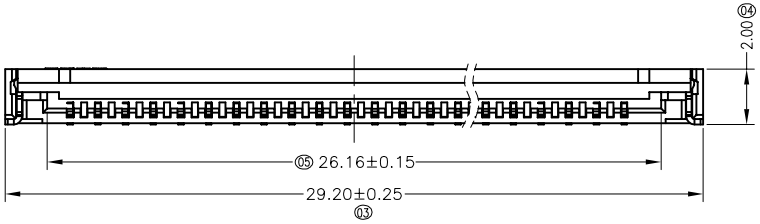

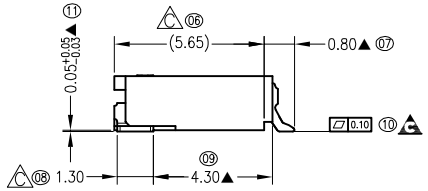

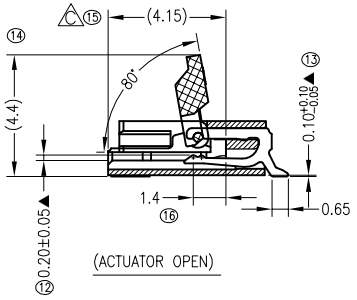

(ACTUATOR OPEN)



(Mating FPC)

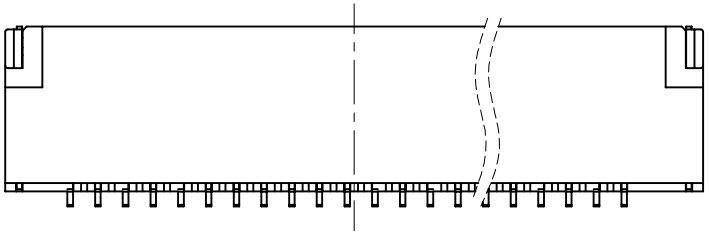

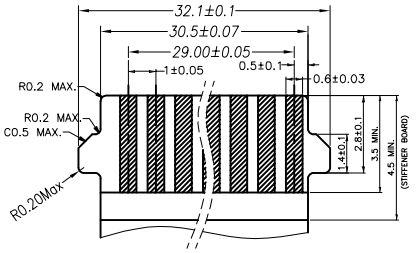



APPLICABLE FPC DIMENSION
(THICKNESS: 0.3±0.05)

REV.	DATE	DESCRIPTION	CHK.	APPD.
C	05.22'14	Modify Dimension	Peak.ke	Bing.Shao
B	11.25'13	SILK LINE	Peak.ke	Rain.Pan
A	12.03'10	New edition	Peak.ke	Rain.Pan

一般公差 GENERAL TOLERANCE

X.X	±0.25	X°	±2°
X.XX	±0.15	X.X°	±1°
X.XXX	±0.10	▲ MAJOR DIM.	

單位 UNIT: mm

繪圖 DR.	Peak.ke
審核 CHK.	Peak.ke
核准 APPD.	Rain.Pan

WJCT
苏州伟聚电子科技有限公司

品名 TITLE
1.0PH 2.0H 25PIN FPC(兩側不對稱)

料號 PART NO.	W4100125-001
圖號 DRAWING NO.	CW41001

SCALE	SHEET	REV.
1/1	1/1	C