RoHS

HF

CUSTOMER DRAWING

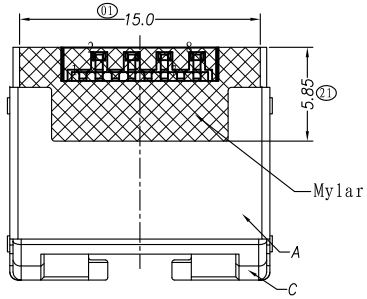



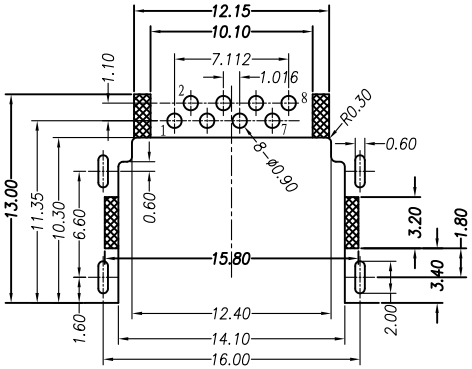

RECOMMENDED P.C.B. LAYOUT(TOP VIEW)

PCB TOLERANCES ±0.05

NO PATTERN AREA

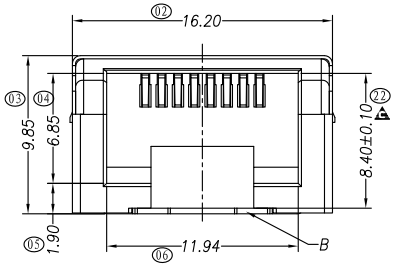

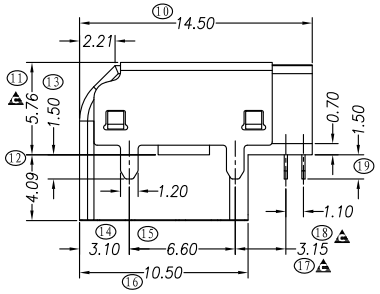

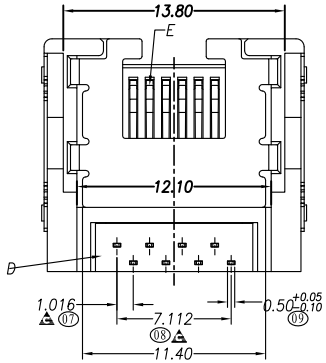

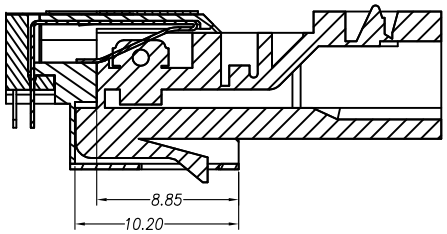

Mating plug

NOTES:

1. SPECIFICATION:
   DIELECTEIC STRENGTH: AC 100V FOR ONE MINUTE
   INSULATION RESISTANCE: 100MΩ Min AT DC 100V
   CONTACT RESISTANCE: 45mΩ Max
   CURRENT RATING: 500mA
   OPERATING TEMPERATURE: -30° ~+85°
2. ⊗ MARK IS MAJOR DIM. ▲ MARK IS CPK DIM.
3. PART NO: WRJ10508-0A00
   - RJ45
   - 0A: Gold Plating

4. list

NO.	PART	Q'TY	MATERAIL&FINISH
A	上壳	1	Steel, T=0.20mm, Plating Ni
B	下壳	1	Steel, T=0.35mm, Plating Ni
C	本体	1	Thermoplastic UL94 V-0, Black
D	塞子	1	Thermoplastic UL94 V-0, Black
E	端子	8	Copper alloy, T=0.20mm. Gold plated in contact area. Tin plated in solder area. Nickel underplating overall.

REV.	REVISION RECORD	DATE
A	新版发行	6.23'14

UNIT: MM

SIZE: A4

GENERAL TOLERANCES	
LINEAR	ANGLES
0.0 ±0.20	X°REF± 6°
0.00 ±0.10	X° ± 3°
0.000±0.05	X°X' ± 2°

SCALE: 1:1	NAME	DATE
APPROVED		
DESIGNER		
DRAWN		

WJCT

苏州伟聚电子科技有限公司

TITLE: RJ45 H5.76 CONN

PART.NO: WRJ10508-0A00

DWG.NO: 650-0000-0005

REV: B

SHEET: 1/1