

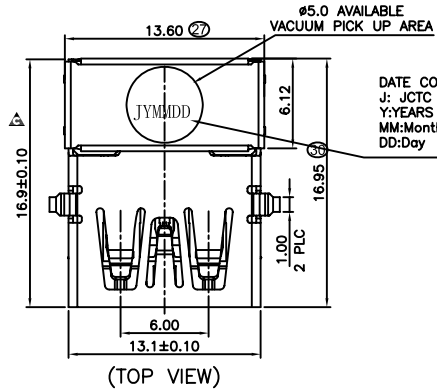


RoHS
HF



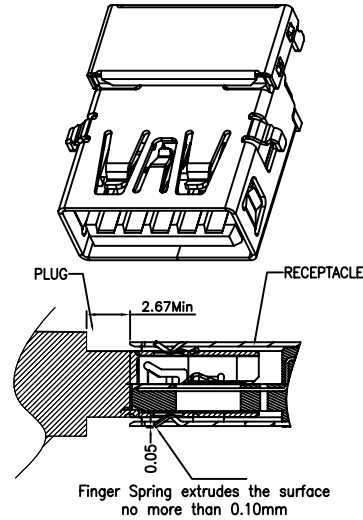


DATE CODE
J: JCTC
Y: YEARS 0-9
MM: Month 01~12
DD: Day 01~31




NOTE:

- MATERIAL:
 - INSULATOR: HIGH TEMPERATURE PLASTIC UL 94 V-0; BLACK
 - CONTACT: COPPER ALLOY (T=0.20mm)
 - SHELL: SUS201 (T=0.30mm)
- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 30mΩ Max
 - CONTACT CURRENT RATING: 1.5A
 - VOLTAGE RATING: 30V
 - DIELECTRIC WITHSTANDING VOLTAGE: 500 V R.M.S.
 - INSULATION RESISTANCE: 100 MEGOHMS Min
 - OPERATING TEMPERATURE: -40° C ~ 85° C
- MECHANICAL CHARACTERISTICS:
 - MATING FORCE: 25 N Max
 - UNMATED FORCE: 7N~20N INITIAL; 1000CYCLES: NO MORE THAN 50% FORM INITIAL, 10000CYCLES: FUNCTION OK.
 - DURABILITY: 10,000 CYCLES
- PLATING
 - CONTACT: 4u" GOLD PLATING ON THE CONTACT AREA, AND 80u" Sn PLATING ON THE SOLDER AREA WITH 50u" NICKEL UNDER PLATING OVERALL.
 - SHELL: 50u" MIN. NICEL ALL OVER

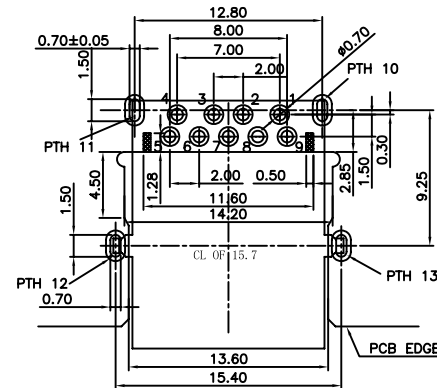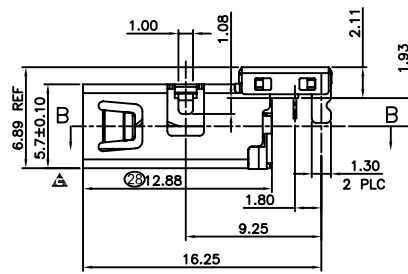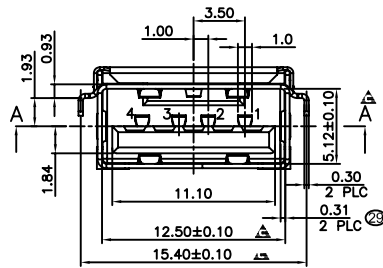

TOLERANCE: ±0.05, THICKNESS: 1.2mm

KEEP OUT AREA

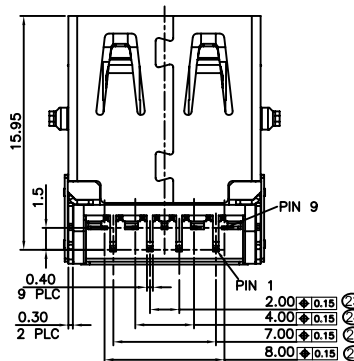

3	SHELL	1	SUS201 T=0.30mm	ALL OVER Ni
2	TERMINAL	9	C5210-EH, T=0.20mm	Gold 4u" ON CONTACT ARER Sn 80 u" ON SOLDER AREA ALL OVER Ni 50 u" Min
1	HOUSING	1	PA 9T UL94 V-0	BLACK
NO.	PARTS	Q'TY	MATERIAL	PLATING & COLOUR

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE
B	修改弹高标注方式	10/17'16	L: LINEAR	A: ANGLES	APPROVED		
			0.0 ±0.20	X° REF ± 6'	DESIGNER		
			UNIT: MM	0.00 ±0.10	X' ± 3'	DRAWN	
			SIZE: A4	0.000 ±0.08	X'X' ± 2'		

WJCT

苏州伟聚电子科技有限公司

TITLE: 黑色USB3.0 AF RVS S-1.93mm H0.93 L16.9mm DIP

PART NO: W-26-0022-0900

DWG NO: W-26-0022-0900

REV: B SHEET: 1/1