
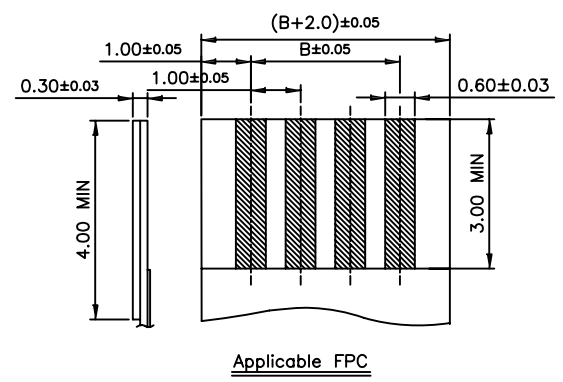
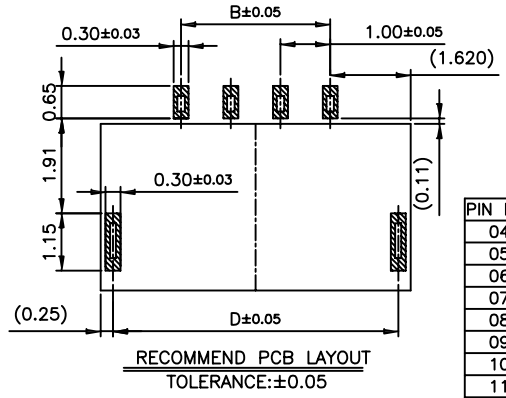

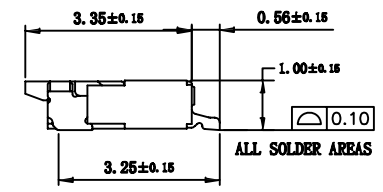
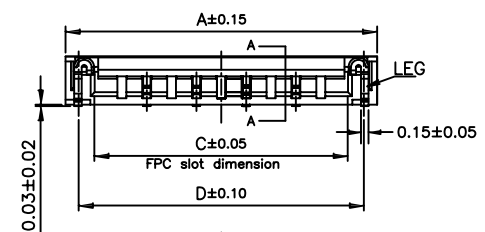



RoHS
HF

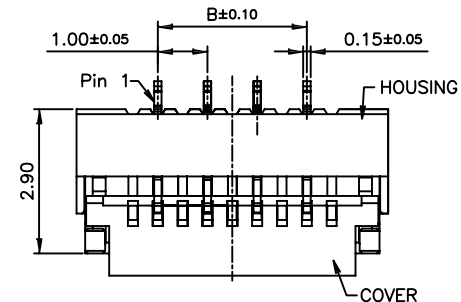

NOTES:

- MATERIAL:**
HOUSING: HIGHT-TEMP PLASTIC, UL 94-V0, COLOR:WHITE;
COVER: HIGHT-TEMP PLASTIC, UL 94-V0, COLOR:BROWN;
CONTACT: COPPER ALLOY;
LEG: COPPER ALLOY;
- PLATING:**
CONTACT: GOLD OR TIN PLATED ON NICKEL OVERALL.
LEG: TIN PLATED ON NICKEL OVERALL.
- RATING:**
CURRENT RATING: 0.4A AC/DC
VOLTAGE RATING: 50V AC/DC
TEMPERATURE RANGE: -55° C~+85° C;
- PART NO:**

41085W90-NPN-S H L XX T B X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

- ① Series No.
- ② W90 :Right angle
- ③ No. of Circuits
- ④ Color: N=Natural
- ⑤ S: SMT type
- ⑥ H:Halogen Free
- ⑦ Material: L=LCP
- ⑧ Plating for contacts:
OA=Gold-flash on contact area
- ⑨ Plating for solder area:
T=Tin Plating (LEG)
- ⑩ Assembly Style
B=Bottom Contacts
R=Tape & Reel
T=Tube Packing

PIN NO	DIM. A	DIM. B	DIM. C	DIM. D	PIN NO.	DIM. A	DIM. B	DIM. C	DIM. D
04	6.27	3.00	5.10	5.74	23	25.27	22.00	24.10	24.74
05	7.27	4.00	6.10	6.74	24	26.27	23.00	25.10	25.74
06	8.27	5.00	7.10	7.74	25	27.27	24.00	26.10	26.74
07	9.27	6.00	8.10	8.74	26	28.27	25.00	27.10	27.74
08	10.27	7.00	9.10	9.74	27	29.27	26.00	28.10	28.74
09	11.27	8.00	10.10	10.74	28	30.27	27.00	29.10	29.74
10	12.27	9.00	11.10	11.74	29	31.27	28.00	30.10	30.74
11	13.27	10.00	12.10	12.74	30	32.27	29.00	31.10	31.74
12	14.27	11.00	13.10	13.74					
13	15.27	12.00	14.10	14.74					
14	16.27	13.00	15.10	15.74					
15	17.27	14.00	16.10	16.74					
16	18.27	15.00	17.10	17.74					
17	19.27	16.00	18.10	18.74					
18	20.27	17.00	19.10	19.74					
19	21.27	18.00	20.10	20.74					
20	22.27	19.00	21.10	21.74					
21	23.27	20.00	22.10	22.74					
22	24.27	21.00	23.10	23.74					

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 苏州伟聚电子科技有限公司 TITLE: FPC 1.0Pitch 1.0H插盘式 connector 0.3排线	PART NO:
A	DRAFT VERSION	7/3'16		LINEAR	ANGLES	APPROVED				PART NO:
			0.0 ±0.30	X'REF ± 6'	DESIGNER	DWG NO:				
			0.00 ±0.20	X' ± 3'	DRAWN	41085W90-NPN-SHLXXTBX				
			UNIT: MM	0.00 ±0.10	X'X' ± 2'				REV: A	SHEET: 1/1

F
E
D
C
B
A

F
E
D
C
B
A